

Leaders in Flexible Transfer Solutions

Central Sales and Manufacturing

Tel: +44 (0) 1933 673699 Fax: +44 (0) 1933 675819
19 The Trinity Centre
Park Farm Industrial Estate,
Wellingborough, NN8 6ZB

Northern Service Centre

Tel: +44 (0) 1706 756400 Fax: +44 (0) 1706 379567
Todmorden Road,
Littleborough,
OL15 9EG

Superview In-Line Sight Glass

Description: The ILSG (In-Line Sight Glass) Provides product viewing for process or safety reasons, whilst the hose assembly is connected. The Teflon (FEP) material coupled with the Series 7000 coupling provides a hygienic assembly.


Note : As standard the assembly will be provided with approximately 100mm visible length. Guards are recommended on sizes 2", and may be beneficial on smaller sizes depending on flex potential



Approvals: FDA

Features:

- 316 Stainless steel or FEP in contact with product, using hygienic fittings
- Shatterproof sight tube for maximum safety
- Uses the series 7000 swaging system for crevice free fitting connection
- Available with or without guard
- Materials of construction for hygienic use
- Detergent or caustic (CIP) cleanable
- Steam cleanable (short duration) SIP

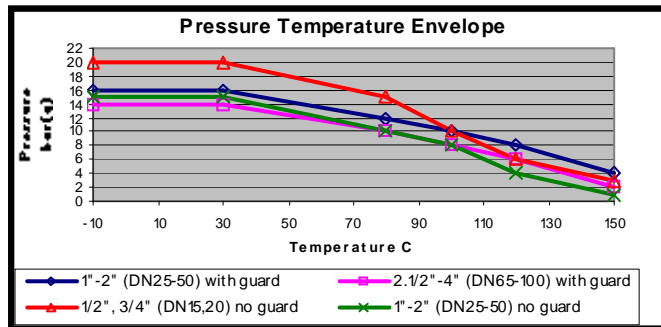

Dimensions			Mesh Guard		
NB inches	DN mm	Id mm	Standard	Dim. A	Dim. A
1/2	15	12.7	2.5	100	400
3/4	20	19.1	3.2	100	400
1	25	21.7	3.2	100	400
1 1/2	40	34.4	3.2	100	400
2	50	47.1	3.2	100	400
2 1/2	65	58.8	3.2	100	400
3	80	72.5	3.2	100	400
4	100	97.9	3.2	100	400

Options: 1) End fittings—Hygienic end connections RJT, IDF/ISS, DIN, SMS, Tri-clamp etc. 2) Elbows—fixed or rotating. 3) Fittings Materials—Hastelloy C22, C276. 4) Guarding—None, mesh or slotted stainless steel. 5) Sight Tube—Heavy wall (4.0—5.3mm) for larger sizes